


Basis Z hydrophilic

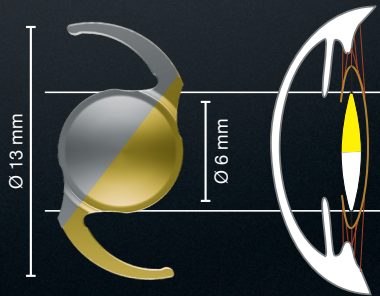

Technical specifications


| | |
|--------------------------|--|
| Haigis-constants* | $a_0 = 0.1657$ $a_1 = 0.3113$ $a_2 = 0.1631$ |
| A-constant* | 118.943 (SRK/T) |
| Refractive Index | 1.46 |
| Abbe No. | 58 |

*IOL Con 12.2021

| | |
|-------------------------|--|
| Lens type | One piece capsular bag IOL |
| Material | Biocompatible hydrophilic acrylic (25%) |
| Haptic | Z haptic, 0° angulation |
| Optic | Aspheric optic, 360° cell barrier |
| Filter | UV filter, blue light filter (optional) |
| Sterilisation | Steam |
| Injection system | 1stInjct 1.8 to 30.0 D 1stInjct 2.0HB, 1stInjct 2.4HB |

■ Basis function

Optical Power



Basis Z hydrophilic

| Art. No. - clear | Art. No. - yellow | Powers | Steps |
|------------------|-------------------|--------------------|-------|
| S1AW00 | S1AWY0 | -10.0 D to -1.0 D | 1.0 D |
| B1AW00 | B1AWY0 | 0.0 D to +9.0 D | 1.0 D |
| B1AW00 | B1AWY0 | +10.0 D to +30.0 D | 0.5 D |
| S1AW00 | S1AWY0 | +31.0 D to +45.0 D | 1.0 D |



For the latest version,
scan the QR code.
www.1stq.de/basisz1058

**Do you have any
questions?**
export@1stq.eu



1stQ GmbH
Konrad-Zuse-Ring 23
68163 Mannheim, Germany
www.1stq.de/en